


## USING THE DT-4 TO PROVIDE DETECTION ON MULTIPLE EXIT TRACKS WITH ONE BD-1

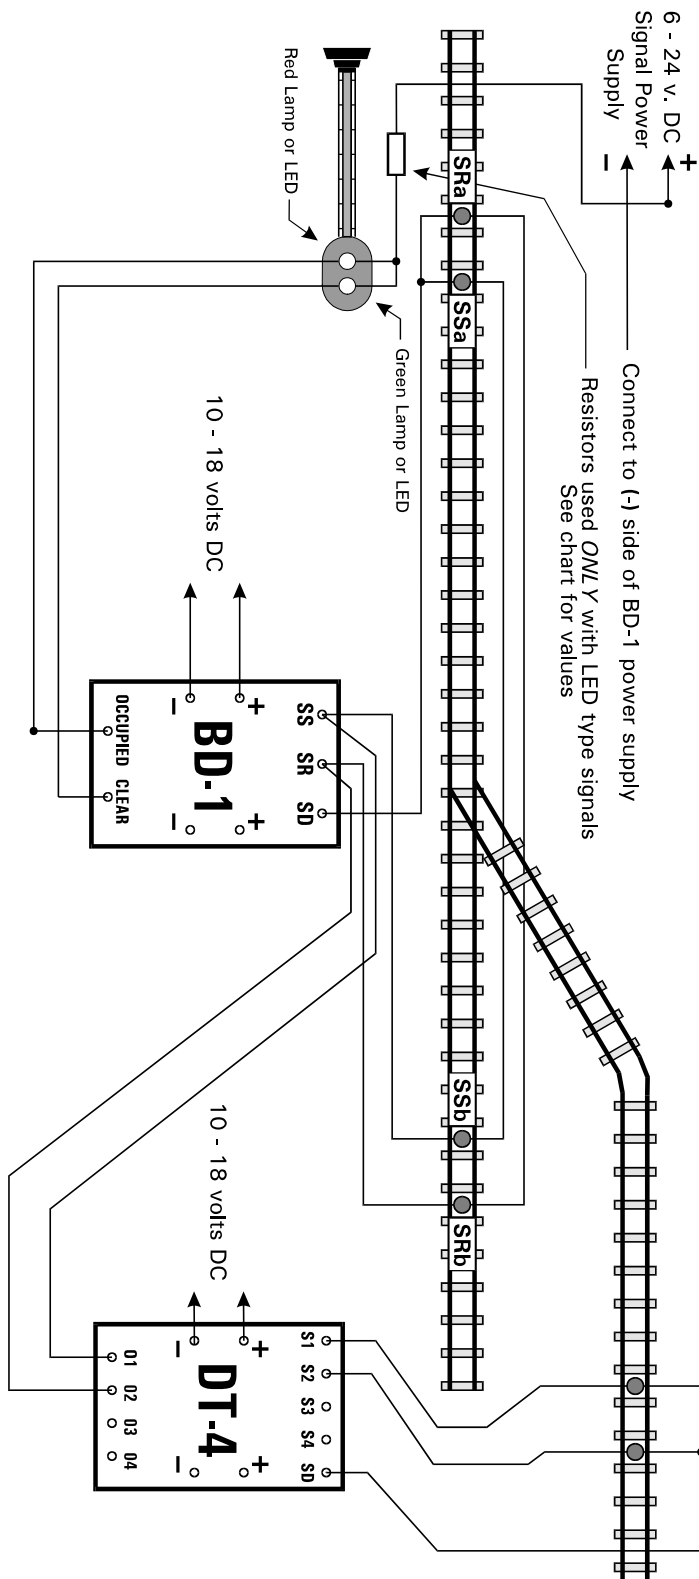

The BD-1 should be adjusted in the normal fashion BEFORE the DT-4 output are connected. Then set the DT-4 sensitivity controls and check to be sure that the indicator lamps on BOTH the DT-4 and the BD-1 light as the DT-4 Opto-Sensors are covered. Additional tracks can be added using other DT-4 channels in similar fashion.